


DURADISK GX53



Sorry this item is
not available
anymore

* Deco range: 10,000 hours.
Base: GX53.

* Working at mains.

* Diffused and soft light.

* An extremely compact lamp for applications which, up until now, could not use energy saving lamps.

* Ideal applications: recessed inside shelves of just 2.9 cm; under wall cupboards with low visual impact; walkways, etc..

* No problems of contact with wood due to the heat (as in the case of dichroic lamps); no transformers to hide.

* Triple mounting options: surface, flush recessed, semi-recessed.

* Finishing bezels available.

Item Characteristics

Code	07930
Lamp Voltage	220-240 V
Nominal Power	9 W
Base	GX53
Lamp Current	0,07 A
Nominal Flux	297 LUMEN
Light Tonality	Homelight
Colour temperature	2700 K
Opening beam	120°
Diameter	74 mm
Lenght	30 mm
Tube Geometry	FLAT


Performance

Irc/Ra	>80
Lifetime	10000 h
Energy Class	A
kWh/1000h	9

Tech Info

Dimmable	NO
Operating Position	360°
Open fittings	YES
Number of ON-OFF cycles	10000
Power Factor	0,55
Warm-up time up to 60 % of the full light output	<60"
Lamp start time	<=0,3S
Mercury (mg)	<2,5mg
LLMMF - Lamp lumen maintenance factor	65
Fulfilled Directives and norms	2006/95/CE * Bassa Tensione 2004/108/CE * Compatibilità Elettromagnetica 2011/65/UE * RoHS 2002/19/UE * RAEE 2009/125/CE * Progettazione Eco Compatibile EN 60968 * anno 2013 EN 61547 * anno 2010 EN 55015 * anno 2014 EN 61000-3-2 * anno 2007 EN 61000-3-2/A1/A2 * anno 2011 EN 61000-3-3 * anno 2014 1194/2012 * Progettazione Eco Compatibile 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling

Spectrocolorimetry and Photometry

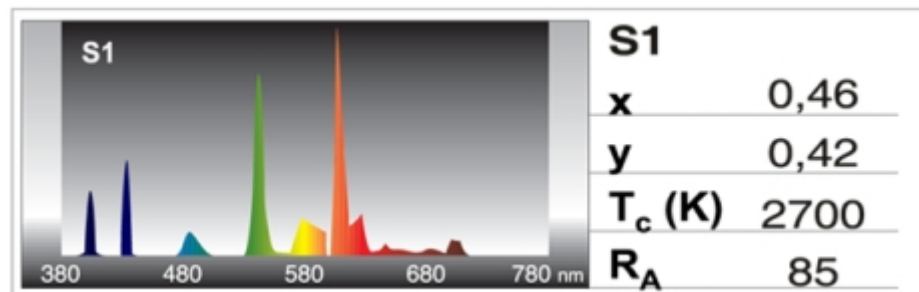

Shipping info

Single pack dimensions L x H x D (mm)	78 x 30 x 78
Item barcode	8011905826161
Pack	10 pz
Inner pack dimensions L x H x D (mm)	325 x 85 x 90
Master barcode	8011905771447
Master pack dimensions L x H x D (mm)	455 x 340 x 200