

## POWER 3-LED 12V DC/AC 50Hz



- \* Base: GU5,3.
- \* 1 x 3W Power LED.
- \* Operating voltage 12V DC/AC 50Hz.
- \* Using latest generation, high emission CREE LED source.
- \* Polycarbonate optics with a diffused surface for a smooth effect.
- \* Aluminium body with satin finish.
- \* Working position: universal.
- \* Working temperature: -25° +40°C.
- \* Extra Long Life.
- \* Perfect for immediately replacing dichroic lamps where powered by an electromagnetic transformer.
- \* Compatible with 12V AC output electro-magnetic transformers.
- \* Compatible with 12V DC/AC 50Hz electronic transformers.
- \* Do not use this item with electronic transformers for halogen lamps.

### Item Characteristics

Code	09327
Lamp Voltage	12 V
Nominal Power	3,5 W
Base	GU5,3
Nominal Flux	120 LUMEN
Light Tonality	Warm White
Opening beam	2x18°
Diameter	50 mm
Length	46 mm
LED Number	1


### Performance

Axis cd	300
Alpha	0,05
Photometry	F30
Irc/Ra	>80
Lifetime	Long Life h
Energy Class	A
kWh/1000h	4

### Tech Info

Dimmable	NO
Operating Position	360°
Open fittings	YES
Power Factor	0,65
Lamp start time	<0,2s
LLMMF - Lamp lumen maintenance factor	70
T (°C) Working environment Temp.	25°C
Fulfilled Directives and norms	2004/108/CE * Compatibilità Elettromagnetica 2011/65/UE * RoHS 2012/19/UE * RAEE EN 61547 * anno 2010 EN 55015 * anno 2014 EN 61000-3-2 * anno 2007 (+A1/+A2:2011) EN 61000-3-3 * anno 201 EN 62471 * anno 2010 IEC/TR 62471-2 EN 62031 * anno 2009 (+A1/2013) 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling 2009/125/CE * Progettazione Eco Compatibile 1194/2012 * Progettazione Eco Compatibile

### Spectrocolorimetry and Photometry

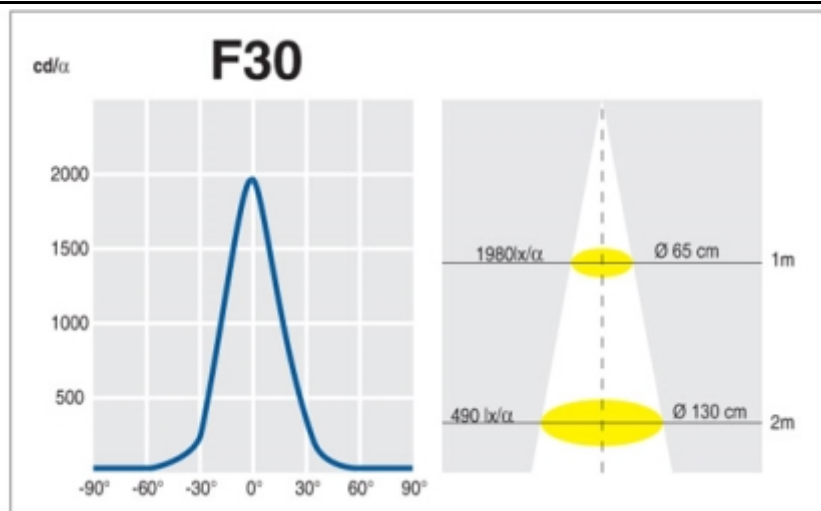

### Shipping info

Item barcode	8011905826079
Pack	10 pz
Master barcode	8011905771355