

## DURALUX D/E

---



- \* Base: G24q, 4 pins.
- \* Lamps for electronic ballasts, can also be used with light dimmers.
- \* Triphosphor powders.
- \* Excellent control of colour temperature and of colour rendering.
- \* Energy savings of 80% compared to the light emission of incandescent lamps.

### Item Characteristics

---

Code	02022
Lamp Voltage	89,5 V
Nominal Power	13 W
Rated Power	12,7 W
Base	G24q-1
Lamp Current	0,171 A
Nominal Flux	900 LUMEN
Rated Flux	900 LUMEN
Light Tonality	Warm light
Colour temperature	3000 K
Diameter	40 mm
Lenght	131 mm

### Performance


---

Irc/Ra	>80
Lifetime	10000 h
Rated lamp efficacy	70 lm/W
Energy Class	A
kWh/1000h	15

### Tech Info

Dimmable	YES
Operating Position	360°
Mercury (mg)	2,5
Lamp Flux Maintenance Factor at 2000h	93%
Lamp Flux Maintenance Factor at 4000h	90%
Lamp Flux Maintenance Factor at 6000h	88%
Lamp Flux Maintenance Factor at 8000h	85%
Lamp Flux Maintenance Factor at 12000h	81%
Lamp Flux Maintenance Factor at 16000h	80%
Lamp survival factor at 2000h	100%
Lamp survival factor at 4000h	100%
Lamp survival factor at 6000h	95%
Lamp survival factor at 8000h	80%
Lamp survival factor at 12000h	45%
T (°C) Working environment Temp.	25°C
Fulfilled Directives and norms	2006/95/CE * Bassa Tensione 2009/125/CE * Progettazione Eco Compatibile 2011/65/UE * RoHS 2012/19/UE * RAEE EN 61199 * anno 2012 EN 61199+A1 * anno 2013 245/2009 * Progettazione Eco Compatibile 347/2010 * Progettazione Eco Compatibile 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling

### Spectrocolorimetry and Photometry

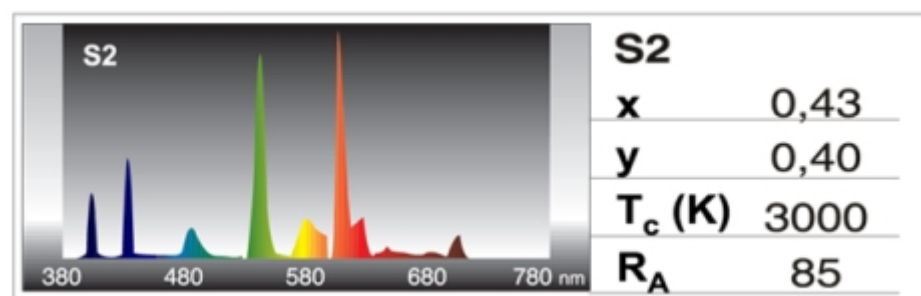

### Shipping info

Single pack dimensions L x H x D (mm)	146 x 35 x 35
Item barcode	8011905190743
Pack	50 pz
Inner pack dimensions L x H x D (mm)	370 x 185 x 156
Master barcode	8011905710545
Master pack dimensions L x H x D (mm)	400 x 400 x 350