

PAR16 XSPOT 10° GU10



- * TYPE: New generation LED lamps with COB technology.
- * CHARACTERISTICS: Super spot lens for very concentrated, beams. High efficiency dichroic effect faceted PMMA refractor for concentrated, clean beams.
- * MATERIAL: Thermally conductive compartment for housing the electronic components: optimization of heat dissipation and greater safety for the user.
- * NB: Dimmable with TRIAC leading edge.

Item Characteristics

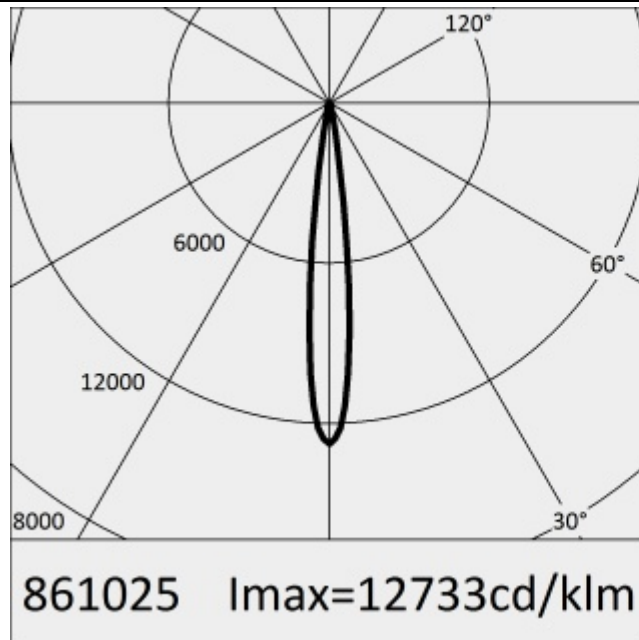
Code	272702-D
Lamp Voltage	220-240 V
Nominal Power	7,5 W
Base	GU10
Lamp Current	0,05 A
Flux	500 LUMEN
Light Tonality	Warm white
Colour temperature	2700 K
Opening beam	10°
Diameter	50 mm
Lenght	48 mm
Weight	46 g

Performance

Axis cd	6360
Photometry	272702-D
Irc/Ra	>80
Lifetime	>25000 h
Energy Class	A+
Equivalence with incandescent lamp	56 W

Tech Info

Dimmable	YES
Operating Position	360°
Power Factor	0,57
Warm-up time up to 60 % of the full light output	Instant Full Light
Lamp start time	<0,2s
T (°C) Working environment Temp.	-25°C / +35°C
Fulfilled Directives and norms	2011/65/UE * RoHS 2012/19/UE * RAEE 2014/30/UE * Compatibilità Elettromagnetica 2014/35/UE * Bassa Tensione EN 61547 * anno 2010 EN 55015 * anno 2014 EN 61000-3-2 * anno 2007 (+A1/+A2:2011) EN 61000-3-3 * anno 2014 EN 62471 * anno 2010 IEC/TR 62471-2 EN 62031 * anno 2009 (+A1:2013) EN 62560 * anno 2013 EN 60968 * anno 2013 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling 2009/125/CE * Progettazione Eco Compatibile 1194/2012 * Progettazione Eco Compatibile

Spectroradiometry and Photometry**2700K**

Fixture Power

Source Flux

Fixture Flux

Efficacy

 I_{max} **Shipping info**

Single pack dimensions L x H x D (mm)	51 x 51 x 62
Item barcode	8011905861025
Pack	10 pz
Master barcode	8011905861797

Ra80		H(m)	D(m)	E _{max} (lx)
r	8W		13°	
	500lm	1	0.22	6367
	532lm	2	0.44	1592
	71lm/W	3	0.67	707
	6367cd	4	0.89	398
		5	1.11	255