

DR111 LED XC - 12V DC/AC



- * Base :G53
- * Operating voltage 12V DC/AC 50Hz.
- * Using High Power CREE LEDs.
- * Fuse for mains protection.
- * Working position: universal.
- * Do not use with dimmer.
- * Warm white colour temperature.
- * Extra Long Life.
- * Unique design of the heat sink: improves the efficiency of heat dissipation.
- * Compatible with 12V AC output electro-magnetic transformers.
- * Compatible with 12V DC/AC 50Hz electronic transformers.
- * Do not use this item with electronic transformers for halogen lamps.

Item Characteristics

| | |
|----------------|------------|
| Code | 07075 |
| Lamp Voltage | 12 V |
| Nominal Power | 11 W |
| Base | G53 |
| Nominal Flux | 470 LUMEN |
| Rated Flux | 0 LUMEN |
| Light Tonality | Warm Light |
| Lumen | 2x14° |
| Diameter | 111 mm |
| Lenght | 75 mm |
| Weight | 292 g |
| Colour | |
| LED Number | 6 |

Performance



| | |
|------------------------------------|----------|
| Axis cd | 1950 |
| Alpha | 0,48 |
| Photometry | F43 |
| Irc/Ra | >80 |
| Lifetime | >15000 h |
| Energy Class | A |
| Equivalence with incandescent lamp | 63 W |

Tech Info

| | |
|---------------------------------------|--|
| Closed fittings only | YES |
| Power Factor | 0,65 |
| Lamp start time | <0,2s |
| LLMMF - Lamp lumen maintenance factor | 70 |
| T (°C) Working environment Temp. | 25°C |
| Fulfilled Directives and norms | 2004/108/CE * Compatibilità Elettromagnetica 2011/65/UE * RoHS 2012/19/UE * RAEE EN 61547 * anno 2010 EN 55015 * anno 2014 EN 61000-3-2 * anno 2007 (+A1/+A2:2011) EN 61000-3-3 * anno 2011 EN 62471 * anno 2010 IEC/TR 62471 -2 EN 62031 * anno 2009 (+A1/2013) 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling 2009/125/CE * Progettazione Eco Compatibile 1194/2012 * Progettazione Eco Co |

Spectrocolorimetry and Photometry

F43

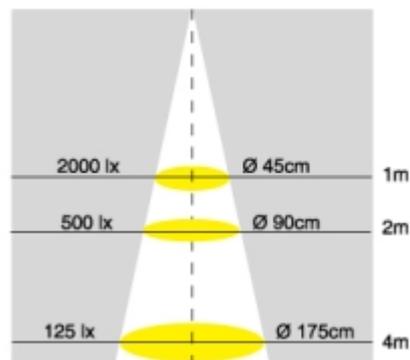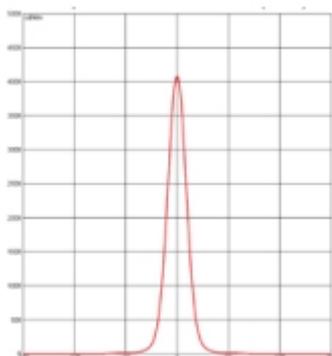

Shipping info

| | |
|----------------|---------------|
| Pack | 6 pz |
| Item barcode | 8011905830823 |
| Master barcode | 8011905776107 |