

MR16 AIR 12V AC 50Hz



- * Employing high power LED by Prolight.
- * Base: GU5,3.
- * Operating voltage 12V AC/DC 50Hz.
- * Fuse for mains protection.
- * Working position: universal.
- * Perfect for immediately replacing dichroic lamps where powered by an electromagnetic transformer.
- * MR16 AIR is particularly appreciated for its light weight and measurements which are exactly the same as a halogen lamp.
- * Compatible with 12V AC 50Hz output electromagnetic transformers and with 12V DC/AC 50Hz electronic transformers.
- * Do not use this item with electronic transformers for halogen lamps.
- * Do not use with dimmers.
- * Can be used with Duralamp power supply for LED Code DELT10A-12.

Item Characteristics

Code	09026
Lamp Voltage	12 V
Nominal Power	6 W
Base	GU5,3
Nominal Flux	260 LUMEN
Light Tonality	Cool White
Colour temperature	6000 K
Opening beam	2x15°
Diameter	50 mm
Length	49 mm
Weight	26 g
LED Number	1


Performance

Axis cd	700
Alpha	0,24
Photometry	F45
Irc/Ra	>70
Lifetime	>15000 h
Energy Class	A
kWh/1000h	7
Equivalence with incandescent lamp	33 W

Tech Info

Dimmable	NO
Operating Position	360°
Open fittings	YES
Power Factor	0,75
Lamp start time	<0,2s
LLMMF - Lamp lumen maintenance factor	70
T (°C) Working environment Temp.	25°C
Fulfilled Directives and norms	2004/108/CE * Compatibilità Elettromagnetica 2011/65/UE * RoHS 2012/19/UE * RAEE EN 61547 * anno 2010 EN 55015 * anno 2014 EN 61000-3-2 * anno 2007 (+A1/+A2:2011) EN 61000-3-3 * anno 201 EN 62471 * anno 2010 IEC/TR 62471-2 EN 62031 * anno 2009 (+A1/2013) 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling 2009/125/CE * Progettazione Eco Compatibile 1194/2012 * Progettazione Eco Compatibile

Spectrocolorimetry and Photometry

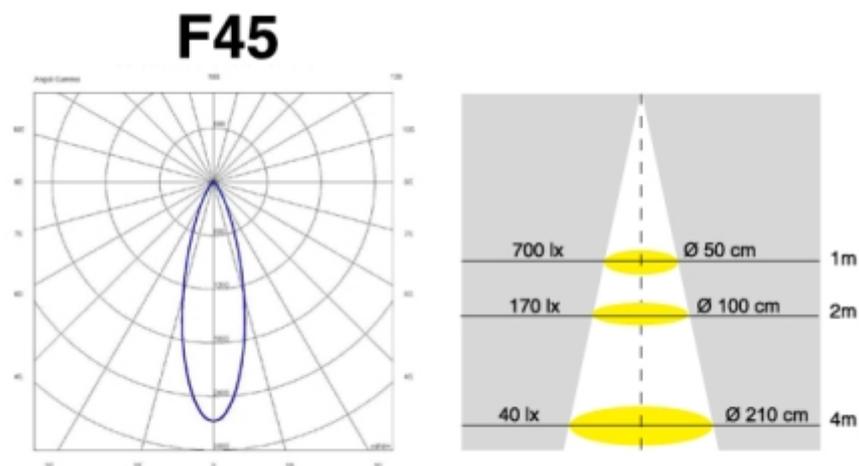

Shipping info

Item barcode	8011905830465
Pack	10 pz
Master barcode	8011905775742