

DICHROIC XENON LONGLIFE MR16 Ø51



- * A complete range of Xenon Halogen lamps; from Bipin to DR111.
- * Bright light.
- * Technology aimed at drastically reducing the natural causes of filament breakage for a dramatic increase in lamp lifetime.
- * Dichroic coating of the reflector: sends the heat towards the back of the lamp.
- * Lifetimes up to 10,000 hours for bipins and MR16s: 5 times longer than a regular lamp of the same type!
- * For professional applications: commercial businesses, public places, reception areas.
- * Lamps for long re-lamping scheduling times.

Item Characteristics

Code	1D1269LX
Lamp Voltage	12 V
Nominal Power	50 W
Base	GU5,3
Lamp Current	4,16 A
Nominal Flux	627 LUMEN
Type of lamp	With safety glass
Colour temperature	3000 K
Opening beam	38°
Diameter	51 mm
Lenght	45 mm

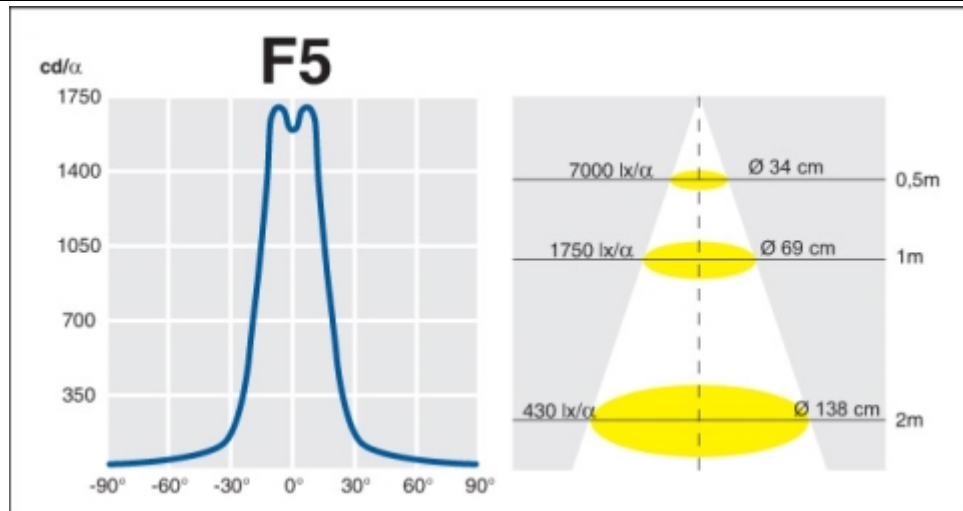
Performance

ANSI	EXN
Axis cd	1600
Alpha	0,80
Photometry	F5
Irc/Ra	100
Lifetime	10000 h
Energy Class	C
kWh/1000h	53
Equivalence with incandescent lamp	59 W

Tech Info

Dimmable	YES
Operating Position	360°
UV Stop quartz bulb	YES
Open fittings	YES
Number of ON-OFF cycles	25000
Power Factor	1
Warm-up time up to 60 % of the full light output	Instant Full Light
Lamp start time	<0,2s
T (°C) Working environment Temp.	-15°C / +35°C

Fulfilled Directives and norms

2011/65/UE * RoHS EN60432-3 * Anno 2013
2010/30/EU * Energy Consumption 874/2012 *
Regulation for Energy Labelling 2009/125/CE *
Progettazione Eco Compatibile 1194/2012 *
Progettazione Eco Compatibile**Spectrocolorimetry and Photometry****Shipping info**

Single pack dimensions L x H x D (mm)	50 x 50 x 50
Item barcode	8011905052867
Pack	20 pz
Inner pack dimensions L x H x D (mm)	257 x 54 x 212
Master barcode	8011905743642
Master pack dimensions L x H x D (mm)	450 x 300 x 280