

DR70 Aluminium reflector



- * Aluminium reflector: low heat radiance towards the rear of the lamp.
- * Excellent control of the beam opening from 4° to 45°.
- * Excellent colour rendering.
- * Ideal for accent installations.
- * Working position: universal.
- * For professional applications, the Xenon Long Life version is recommended.

Item Characteristics

| | |
|--------------------|-----------|
| Code | 1D000899 |
| Lamp Voltage | 12 V |
| Nominal Power | 50 W |
| Base | BA15d |
| Lamp Current | 4,16 A |
| Nominal Flux | 468 LUMEN |
| Colour temperature | 3000 K |
| Opening beam | 8° |
| Diameter | 70 mm |
| Lenght | 50 mm |
| Weight | 30 g |

Performance


| | |
|--------------|--------|
| Axis cd | 12500 |
| Alpha | 0,47 |
| Photometry | F8 |
| Irc/Ra | 100 |
| Lifetime | 2000 h |
| Energy Class | C |
| kWh/1000h | 53 |

Tech Info

| | |
|--|--|
| Dimmable | YES |
| Operating Position | 360° |
| UV Stop quartz bulb | YES |
| Open fittings | YES |
| Filament | Axial |
| Number of ON-OFF cycles | 25000 |
| Power Factor | 1 |
| Warm-up time up to 60 % of the full light output | Instant Full Light |
| Lamp start time | <0,2s |
| T (°C) Working environment Temp. | -15°C / +35°C |
| Fulfilled Directives and norms | 2011/65/UE * RoHS EN60432-3 * Anno 2013 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling 2009/125/CE * Progettazione Eco Compatibile 1194/2012 * Progettazione Eco Compatibile |

Spectrocolorimetry and Photometry

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products.

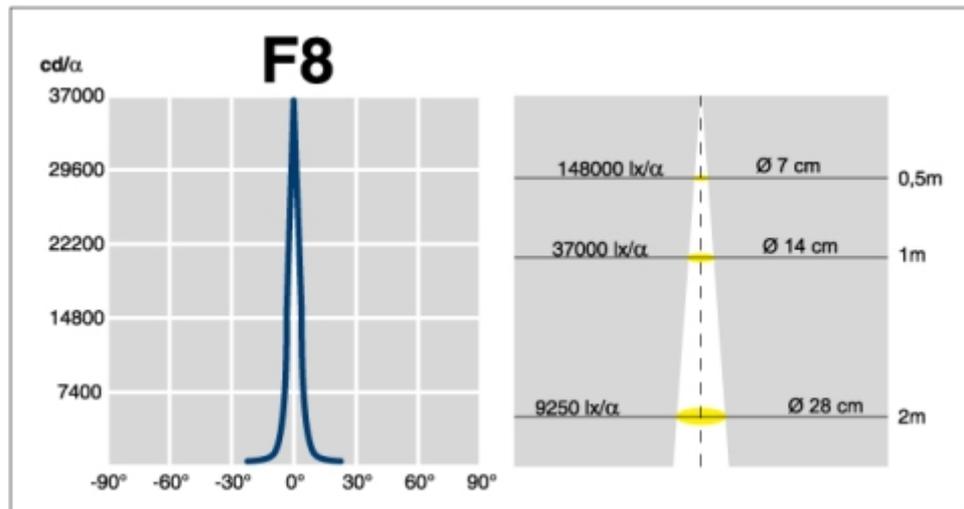

Shipping info

| | |
|----------------|---------------|
| Item barcode | 8011905055158 |
| Pack | 10 pz |
| Master barcode | 8011905745776 |