

## DURALUX ECO

---



- \* MINI ECO and ECO range: 10.000 hours.
- \* Base: E27 and E14.
- \* Significant electronic part miniaturization and consequent reduction in required plastic base diameter up to 37 mm.
- \* Wide selection of wattages: from 7W to 24W.
- \* Colour temperature choice.
- \* A perfect alliance between efficiency and low cost: quality and maximum savings.
- \* For domestic use, offices, etc.

### Item Characteristics

Code	07058
Lamp Voltage	220-240 V
Nominal Power	12 W
Base	E14
Nominal Flux	600 LUMEN
Light Tonality	Cool light
Colour temperature	6400 K
Diameter	46 mm
Length	130 mm
Tube Geometry	3U
Tube diameter	12 mm


### Performance

Irc/Ra	>80
Lifetime	10000 h
Energy Class	A
kWh/1000h	12
Equivalence with incandescent lamp	51 W

### Tech Info

Dimmable	NO
Operating Position	360°
Open fittings	YES
Number of ON-OFF cycles	10000
Power Factor	0,55
Warm-up time up to 60 % of the full light output	<30"
Lamp start time	<=0,3S
Mercury (mg)	<2,5mg
LLMMF - Lamp lumen maintenance factor	65
Fulfilled Directives and norms	2006/95/CE * Bassa Tensione 2004/108/CE * Compatibilità Elettromagnetica 2011/65/UE * RoHS 2002/19/UE * RAEE 2009/125/CE * Progettazione Eco Compatibile EN 60968 * anno 2013 EN 61547 * anno 2010 EN 55015 * anno 2014 EN 61000-3-2 * anno 2007 EN 61000-3-2/A1/A2 * anno 2011 EN 61000-3-3 * anno 2014 244/2009 * Progettazione Eco Compatibile 859/2009 * Progettazione Eco Compatibile 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling

### Spectrocolorimetry and Photometry

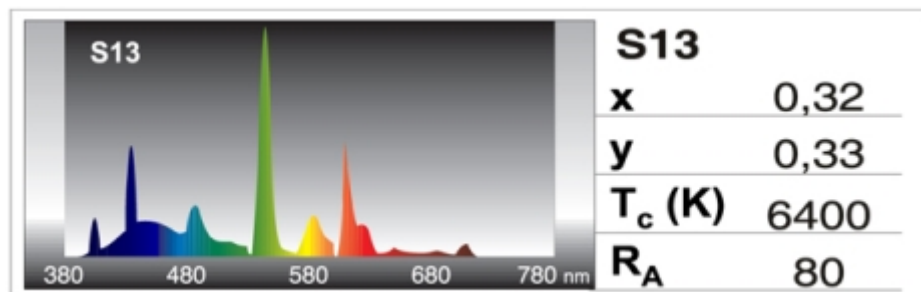

### Shipping info

Item barcode	8011905818715
Pack	10 pz
Master barcode	8011905763749