

## XENON MR16 CONSTANT LIGHT 8000h



Sorry this item is not available anymore

- \* Bright light.
- \* Technology aimed at drastically reducing the natural causes of filament breakage for a dramatic increase in lamp lifetime.
- \* Xenon Constant Light Dichroic 8,000h
- \* Aluminized reflector and safety glass.  
The light colour remains constant throughout the life of the lamp, an important feature for high prestige applications (museums, etc.).
- \* For professional applications: commercial businesses, public places, reception areas.
- \* Lamps for long re-lamping scheduling times.

### Item Characteristics

Code	01569LX
Lamp Voltage	12 V
Nominal Power	50 W
Base	GU5,3
Lamp Current	4,16 A
Nominal Flux	558 LUMEN
Type of lamp	With safety glass and aluminized reflector
Colour temperature	3000 K
Opening beam	38°
Diameter	51 mm
Lenght	45 mm

### Performance


ANSI	EXN
Axis cd	700
Alpha	0,80
Photometry	F3
Irc/Ra	100
Lifetime	8000 h
Energy Class	C
kWh/1000h	53

### Tech Info

Dimmable	YES
Operating Position	360°
UV Stop quartz bulb	YES
Open fittings	YES
Number of ON-OFF cycles	25000
Power Factor	1
Warm-up time up to 60 % of the full light output	Instant Full Light
Lamp start time	<0,2s
Fulfilled Directives and norms	2011/65/UE * RoHS EN60432-3 * Anno 2013 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling 2009/125/CE * Progettazione Eco Compatibile 1194/2012 * Progettazione Eco Compatibile

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products.

## Spectrocolorimetry and Photometry

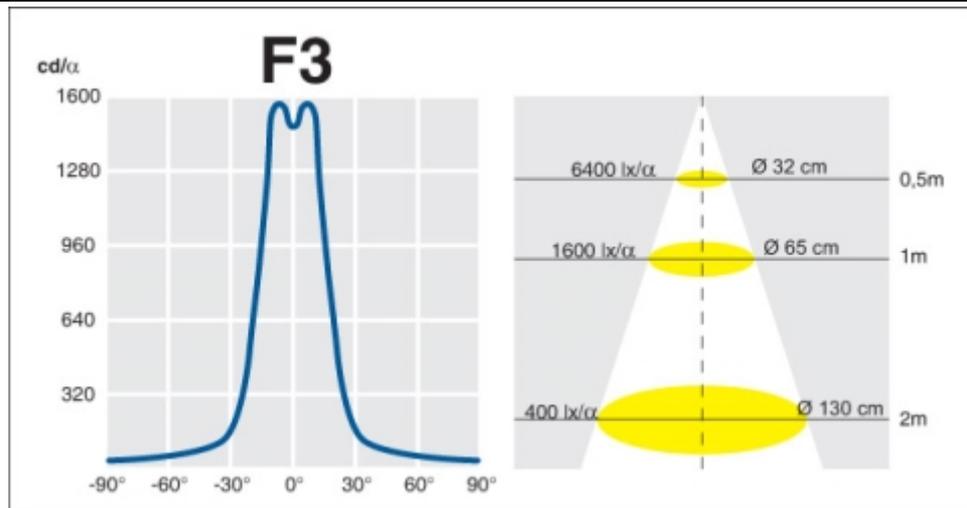

## Shipping info

Single pack dimensions L x H x D (mm)	50 x 50 x 50
Item barcode	8011905815653
Pack	20 pz
Inner pack dimensions L x H x D (mm)	257 x 54 x 212
Master barcode	8011905759759
Master pack dimensions L x H x D (mm)	450 x 300 x 280