

Low voltage DURALUX



- * Long life range: 12,000 hours.
- * DC use only.
- * The lumen intensity of fluorescent lamps with maximum energy savings also guaranteed by the low voltage.
- * Applications: shipbuilding industry, motor caravans, boats, emergency lights, appliances powered by photovoltaic systems.

Item Characteristics

Code	02050/12V
Lamp Voltage	12 V
Nominal Power	15 W
Base	E27
Lamp Current	2,27 A
Nominal Flux	800 LUMEN
Rated Flux	750 LUMEN
Light Tonality	Homelight
Colour temperature	2700 K
Diameter	44 mm
Length	180 mm
Colour	

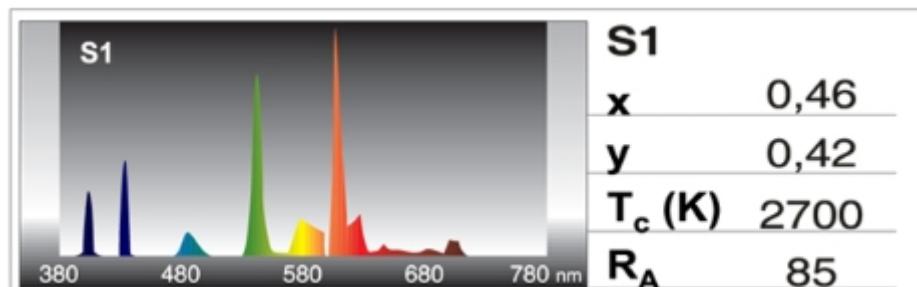
All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products.

Performance

Irc/Ra	>80
Lifetime	12000 h
Energy Class	A++
Equivalence with incandescent lamp	64 W

Tech Info

Closed fittings only	YES
Number of ON-OFF cycles	12000
Power Factor	0,55
Warm-up time up to 60 % of the full light output	<30"
Lamp start time	<=0,3S
Mercury (mg)	<2,5mg
LLMMF - Lamp lumen maintenance factor	65
Fulfilled Directives and norms	2004/108/CE * Compatibilità Elettromagnetica 2011/65/UE * RoHS2002/96/CE * RAEE2009/125/CE * Progettazione Eco CompatibileEN 60968 * Fascicolo 7287C, Anno 2004EN 61547 * Fascicolo 10286, Anno 2010EN 55015 * Fascicolo 9308, Anno 2008EN 61000-3-2 * Fascicolo 8802, Anno 2007EN 61000-3-3 * Fascicolo 9968, Anno 2009859/2009 * Progettazione Eco Compatibile2010/30/EU * Energy Consumption874/2012 * Regulation for Energy Labelling

Sectrocolorimetry and Photometry

Shipping info

Pack	10 pz
Item barcode	8011905807573
Master barcode	8011905753214