

WHITE LIGHT DICHROIC MR16 Ø51



- * WHITE LIGHT: a line of halogen lamps with a colder and brighter light tonality (4200K).
- * For precisely lighting objects and surfaces with cold colours or chrome-plated reflections.
- * Recommended for avoiding the 'yellow spot' effect, typical of halogen lamps, where the general lighting consists of fluorescent or discharge lamps at 4000K.
- * Indispensable for making diamonds and platinum shine with their best hue in jewellery stores.
- * Ideal in stores selling crystalware and silver objects, wedding dresses, for dental surgeries technical offices, etc.

Item Characteristics

Code	1D001470
Lamp Voltage	12 V
Nominal Power	20 W
Base	GU5,3
Lamp Current	1,66 A
Nominal Flux	151 LUMEN
Type of lamp	With safety glass
Colour temperature	4200 K
Opening beam	36°
Diameter	51 mm
Lenght	45 mm
Weight	30 g


Performance

ANSI	BAB
Axis cd	460
Alpha	0,29
Photometry	F3
Irc/Ra	100
Lifetime	2000 h
Energy Class	C
kWh/1000h	22

Tech Info

Dimmable	YES
Operating Position	360°
UV Stop quartz bulb	YES
Open fittings	YES
Number of ON-OFF cycles	25000
Power Factor	1
Warm-up time up to 60 % of the full light output	Instant Full Light
Lamp start time	<0,2s
T (°C) Working environment Temp.	-15°C / +35°C
Fulfilled Directives and norms	2011/65/UE * RoHS EN60432-3 * Anno 2013 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling 2009/125/CE * Progettazione Eco Compatibile 1194/2012 * Progettazione Eco Compatibile

Spectrocolorimetry and Photometry

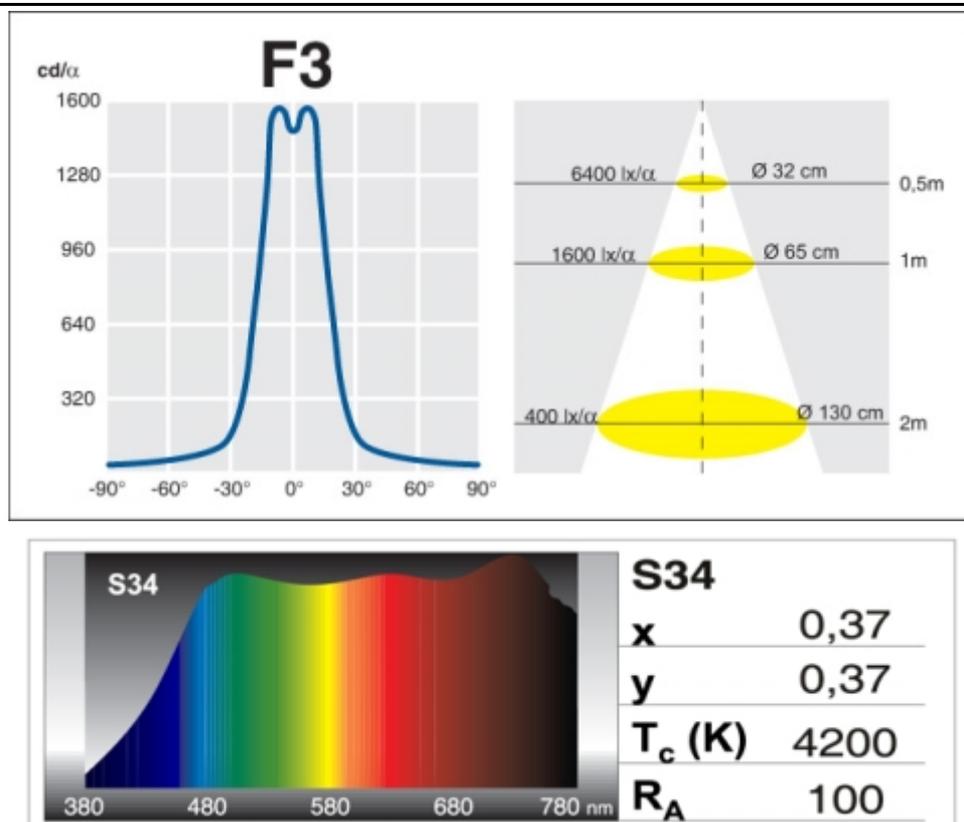

Shipping info

Single pack dimensions L x H x D (mm)	50 x 50 x 50
Item barcode	8011905039714
Pack	20 pz
Inner pack dimensions L x H x D (mm)	257 x 54 x 212
Master barcode	8011905731441
Master pack dimensions L x H x D (mm)	450 x 300 x 280